

NSE6DG8100

Bespoke Smart Slide-In Electric Range 6.3 cu. ft.
with Precision Knobs

SAMSUNG



Available Colors

- Stainless Steel**
NSE6DG8100SR
- Matte Black Steel**
NSE6DG8100MT

Features

- Precision Knobs
- Glass Touch Controls
- Self & Steam Clean
- Storage Drawer

Convenience

- Wi-Fi Connectivity
- Voice-Enabled
- Self & Steam Clean
- Hidden Bake Element
- Child Safety Lock
- Delay Start
- Auto Oven Light
- Kitchen Timer
- Sabbath Mode

Specifications

- Electric Ceramic Cooktop**
- Right Front: 6"/9" 3,000W
 - Left Front: 6"/9" 3,000W
 - Right Rear: 6" 1,200W
 - Left Rear: 6" 1,200W
 - Center: 6" Warming Zone (100W)
- Oven**
- Capacity: 6.3 cu. ft.
 - Bake
 - Variable Broil: Low/High
 - Keep Warm
 - Bread Proof

Dimensions

- Oven Interior Dimensions (WxHxD)**
Dimensions: 24¹³/₁₆" x 22⁷/₁₆" x 19³/₄"
- Product Dimensions (WxHxD)**
Dimensions: 29¹⁵/₁₆" x 36¹/₄" - 37" (Adj.) x 27⁷/₈"
Weight: 157.2 lbs
- Shipping Dimensions & Weight (WxHxD)**
Dimensions: 33¹/₁₆" x 41¹/₈" x 30⁵/₁₆"
Weight: 176.8 lbs

Warranty

One (1) Year Parts and Labor

UPC

Finish	Model #	UPC Code
Stainless Steel	NSE6DG8100SR	887276817279
Matte Black Steel	NSE6DG8100MT	887276817262

Bespoke Smart Slide-In Electric Range 6.3 cu. ft. with Precision Knobs


Bespoke Smart Slide-In Electric Range 6.3 cu. ft. with Precision Knobs

Technical diagram showing the installation of a 24-inch wide unit into a 29 3/4 inch wide opening. The diagram includes dimensions for the unit (24 inches wide, 35 7/8 inches high) and the opening (29 3/4 inches wide, 36 1/4 to 37 inches high). It also shows the placement of a 6-inch wide panel (A) and a 3-inch wide panel (B) to complete the installation.

240V/208V/60 Hz
40 Amps

A: Cabinet opening minimum 30"
B: Acceptable electrical outlet area

IMPORTANT: If your cabinets are over 37" high, you must install this range on a hard, heat resistant support that raises the surface of the range so that it is about even with the countertop.

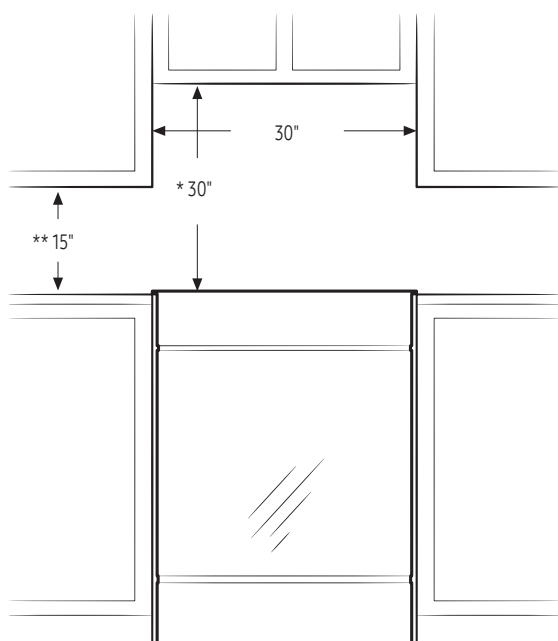

* 30" minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or 24" minimum when the bottom of the wood or metal cabinet is protected by not less than ¼" of flame retardant millboard covered with not less than no.28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum, or 0.020" copper.

*15" minimum between the countertop and the adjacent cabinet bottom.

IMPORTANT: Consult with Installation Manual for detailed instructions before installing. All ranges must be installed with the Anti-Tip device that is included.

