

Bespoke Smart Slide-In Electric Range 6.3 cu. ft.
with Air Fry & Precision Knobs



Available Colors

- Stainless Steel
NSE6DG8300SR
- White Glass
NSE6DB830012

Features

- Air Fry, Tray Included
- Precision Knobs
- Convection
- Glass-Touch Controls
- Self & Steam Clean
- Storage Drawer

Convenience

- Wi-Fi Connectivity
- Voice-Enabled
- Convection Auto Conversion
- Self & Steam Clean
- Hidden Bake Element
- Child Safety Lock
- Delay Start
- Auto Oven Light
- Kitchen Timer
- Sabbath Mode

Specifications

- Electric Ceramic Cooktop**
- Right Front: 9"/12" 3,000W
 - Left Front: 6"/9" 3,000W
 - Right Rear: 6" 1,200W
 - Left Rear: 6" 1,200W
 - Center: 6" Warming Zone (100W)
- Oven**
- Capacity: 6.3 cu. ft.
 - Convection Bake
 - Convection Roast
 - Bake
 - Variable Broil: Low/High
 - Air Fry
 - Keep Warm
 - Bread Proof
 - Dehydrate

Dimensions

- Oven Interior Dimensions (WxHxD)**
Dimensions: 24¹³/₁₆" x 22⁷/₁₆" x 19³/₄"
- Product Dimensions (WxHxD)**
Dimensions: 29¹⁵/₁₆" x 36¹/₄" – 37" (Adj.) x 27⁷/₈"
Weight: 160.5 lbs
- Shipping Dimensions & Weight (WxHxD)**
Dimensions: 33¹/₁₆" x 41¹/₈" x 30⁵/₁₆"
Weight: 180.1 lbs

Warranty

One (1) Year Parts and Labor

UPC


Finish	Model #	UPC Code
Stainless Steel	NSE6DG8300SR	887276817293
White Glass	NSE6DB830012	887276817231

NSE6D*8300

SAMSUNG

Bespoke Smart Slide-In Electric Range 6.3 cu. ft.
with Air Fry & Precision Knobs

Installation Specifications

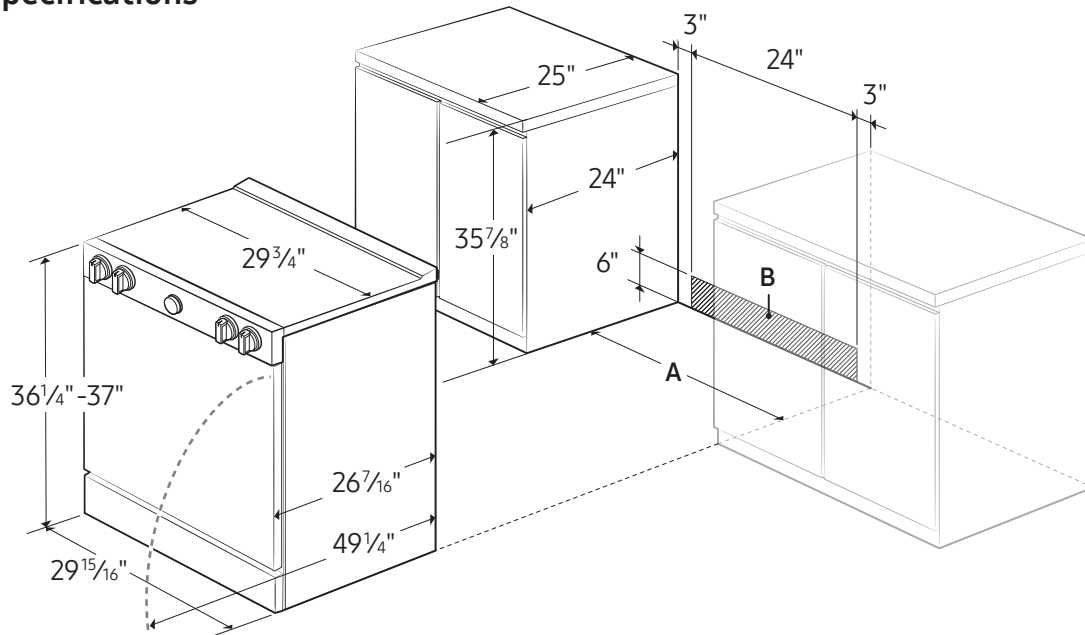

Electrical Requirements


240V/208V/60 Hz

40 Amps

A: Cabinet opening minimum 30"

B: Acceptable electrical outlet area

IMPORTANT: If your cabinets are over 37" high, you must install this range on a hard, heat resistant support that raises the surface of the range so that it is about even with the countertop.

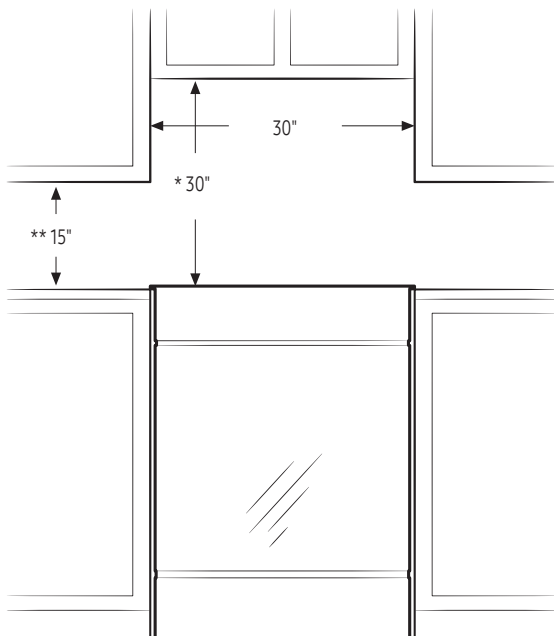

* 30" minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or 24" minimum when the bottom of the wood or metal cabinet is protected by not less than 1/4" of flame retardant millboard covered with not less than no.28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum, or 0.020" copper.

**15" minimum between the countertop and the adjacent cabinet bottom.

IMPORTANT: Consult with Installation Manual for detailed instructions before installing. All ranges must be installed with the Anti-Tip device that is included.